

Super Critical Chamber Type Spark Arresting: Expected Attenuation is 30 to 38 dBA

Use a model MSA33 for quiet residential areas where background noise is relatively low and "super critical" grade silencing with a spark arresting feature is required.

Example: For truly quiet residential areas where ambient noise levels are very low and the sound of birds singing and the soft hum of air conditioning units may be the noticeable noise features.

OVERVIEW

TYPICAL APPLICATIONS




- Internal combustion engine exhausts
- Marine service
- Refineries / Hazardous environments
- Offshore drilling / Production platforms

FEATURES

- Advanced acoustical design
- Heavy duty, all welded construction and long service life
- Easily installed in any position
- High heat silicone black finish
- Two chambers
- Efficient spark arresting
- Drain connection

OPTIONAL ACCESSORIES

- Explosion relief cover
- Flexible connectors
- Companion flanges
- Cleanout openings
- Side inlet
- Horizontal or vertical support arrangements
- Special paint
- Stainless steel construction: 304, 316 & 321
- Complete range of exhaust accessories
- Spark arresting efficiency certification

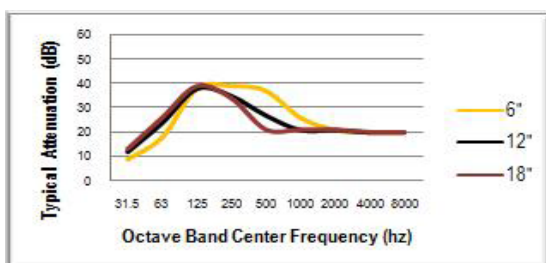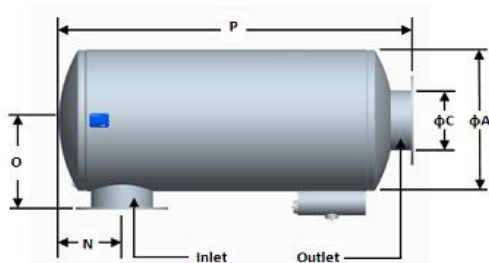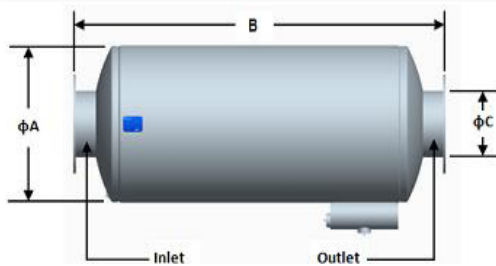

Size	A	B	C	N	O	P	Est Wt.
4"	16	51	4	6 ½	12	47	94
5"	18	62	5	7	13	58	130
6"	22	69	6	8 ½	15	65	186
8"	26	82	8	10	17	78	318
10"	30	102	10	12	19	98	494
12"	36	112	12	15	22	108	690
14"	44	120	14	15 ½	25	115	968
16"	45	126	16	17	27 ½	121	1155
18"	50	135	18	19 ½	30	130	1636
20"	54	149	20	21 ½	32	144	2086
22"	60	157	22	23	35	152	2492
24"	64	164	24	24 ½	37	159	2831
26"	68	184	26	25 ½	39	179	3316
28"	72	205	28	27	41	200	3821
30"	78	220	30	28 ½	44	215	5324

Note: Dimensions are in inches, weights are in pounds